


Ha-VIS eCon 2000

Fast Ethernet Basic

PoE / PoE+

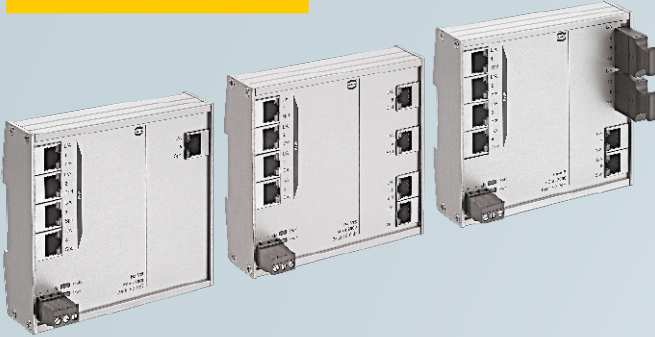

5 to 8 Ethernet ports RJ45, SC and PoE / PoE+
 Unmanaged Plug & Play Ethernet switches for DIN rail assembly in control cabinets
 Commercial Temp.: 0 °C ... +55 °C / Industrial Temp.: -40 °C ... +70 °C



- Energy supply of up to 4 terminal devices via PoE+ (137 watts) according to IEEE 802.3at
- Fast Ethernet Non-Blocking Switch architecture according to IEEE 802.3
- Variants with industrial temperature range of -40°C ... +70 °C
- Surge protection and reverse polarity protection
- Minimum energy consumption due to Energy-Efficient Ethernet

Target markets

| | | |
|-----------------------------|-----------------------|------------------------------------|
| Machinery & Robotics | Automation technology | Industrial network infrastructures |
| Wind Energy Solar Energy | Transportation | Shipbuilding |

General description

The Ha-VIS eCon 2000 Fast Ethernet PoE family of unmanaged Ethernet switches is equipped with up to 8 Fast Ethernet ports and allow for cost-efficient and quick expansion and/or reconstruction of network infrastructures. The switches work as power sourcing equipment (PSE) and are capable of simultaneously providing the full PoE output of 34.2 watts on up to four ports. Owing to the extremely flat design, these switches can be accommodated in installations where space is restricted towards the cable

connection at the front. The selection includes various combinations of variants with RJ45 and fibre optic ports. Automatic detection of the transmission rate (auto-negotiation) and of the wiring of the twisted pair data cable (autopolarity and auto-MDI(X)) allow for simple plug & play. All variants are available with the temperature ranges "Industrial" and "Commercial".

Technical characteristics

Switch Features

| | | |
|---------------------------|-------------------|--|
| Enclosures width | 120 mm | |
| Number of ports | 5, 7, 8 | |
| Switching technology | Store and Forward | |
| Supported standards | IEEE 802.3 | |
| Frame Size | 1552 bytes | |
| MAC table size | 1k entries | |
| Packet buffer size | 448 kbit | |
| Non-blocking | Yes | |
| Quality of service | Yes | |
| Energy-Efficient Ethernet | Yes | |
| PROFINET compatible | Yes | |
| EthernetIP compatible | Yes | |

Voltage supply

| | | |
|------------------------------------|--|----------------------------|
| Nominal voltage | 48 VDC \equiv | 54 VDC \equiv |
| Permissible voltage range | 44 VDC ... 57 VDC \equiv | 50 VDC ... 57 VDC \equiv |
| Surge protection | Yes | |
| Reverse polarity proof | Yes | |
| Starting current | 6.40 A | 7.20 A |
| Overcurrent protection at input | Yes (4 A) | |
| Max. power consumption without PoE | 1.2 W ... 3.36 W | |
| Cross-section / Wire gauge | 0.08 mm ² ... 2.5 mm ² (28 AWG ... 12 AWG) | |
| Connection type | 3-pole, pluggable screwed contact | |
| Pinout | + / - / \oplus | |
| Supply circuit (acc. to 60950) | SELV (circuit breaker 10 A) | |

Ethernet Ports 10BASE-T_e / 100BASE-TX EEE

| | | |
|---------------------|-----------------------------|--|
| Connection type | RJ45 | |
| Auto-negotiation | Yes | |
| Auto-polarity | Yes | |
| Auto-MDI(X) | Yes | |
| Transfer conditions | Twisted Pair | |
| Transfer speed | 10 / 100 Mbit/s | |
| Transfer length | 100 m (twisted pair, Cat 5) | |

Ethernet Ports 100BASE-FX

| Type of fibre | Multimode (MM) | Singlemode (SM) |
|---------------------|---------------------|--------------------|
| Connection type | SC Duplex | |
| Transfer conditions | FO | |
| Wavelength | 1310 nm | |
| Transfer speed | 100 Mbit/s | |
| Transfer length | 2 km | 15 km |
| Output power | -19 dBm ... -14 dBm | -15 dBm ... -8 dBm |
| Input sensitivity | ≤ -32 dBm | ≤ -34 dBm |

Ambient conditions

| | |
|---|-------------------------------|
| Commercial temperature range | 0 °C ... +55 °C |
| Industrial temperature range | -40 °C ... +70 °C |
| Storage temperature range | -40 °C ... +85 °C |
| Relative humidity (operation) | 0 % ... 95 % (not-condensing) |
| Relative humidity (storage and transport) | 0 % ... 95 % (not-condensing) |
| Air pressure (operation) | 2000 m (795 hPa) |

Note: We reserve the right to make technical changes to the products and to the content of this document at any time without prior notification. The HARTING Technologiegruppe does not accept any responsibility for possible errors or incompleteness in this document. We reserve all the rights to this document and the topics and illustrations contained within it. Copying, disclosure to third parties or use of its content - even partially - is forbidden without the prior written consent of the HARTING Technologiegruppe.

| PoE | PoE | PoE+ |
|------------------------------|---|----------------------------------|
| Number of PoE ports | 4 | |
| Standard | IEEE 802.3af / IEEE 802.3at | |
| PoE type | PSE | |
| Supported mode | Alternative A | |
| Supply voltage PSE | 48 VDC | 54 VDC |
| Max. current consumption PSE | 1380 mA | 2380 mA |
| Max. current | 375 mA | 638 mA |
| Maximum output power PSE | 15.4 W per port 61.6 W total | 34.2 W per port 136.8 W total |
| Supported cabling | See 802.3at, section 33.1.4 | |
| PoE pinout | Alternative A, MDI-X (1/2 = V-, 3/6 = V+) | |

Status and diagnostic displays

| | |
|---------------------------------------|--|
| Power („Pwr“) Φ lights up green | Supply voltage is applied |
| Link/Activity („L/A“) off | No link |
| Link/Activity („L/A“) lights up green | Link is active |
| Link/Activity („L/A“) flashes green | Link is active and data is transferred |
| Link speed („Spd“) off | 10 Mbit/s |
| Link speed („Spd“) lights up yellow | 100 Mbit/s |
| PoE status off | PoE is inactive / low voltage |
| PoE status lights up green | Voltage in PoE range |
| PoE status lights up blue | Voltage in PoE+ range |
| PoE-Status lights up red | Error |

Enclosures

| | |
|--|----------------------------------|
| Enclosures width | 120 mm |
| Dimensions H x W x D (without pluggable screw contact and holding bracket) | 113.5 mm x 120 mm x 27.3 mm |
| Weight | 364 g ... 420 g |
| Type of installation | 35 mm DIN rail acc. to EN 60 715 |
| Material enclosures | Anodised aluminium |
| Protection degree (with plugged screw contact) | IP30 |
| Protection class | III |

Approvals

CE, FCC CFR 47 Part 15, cUL US 508 listed, DNV GL, LR, NK, ABB IIT
ECE - Approval mark (E1): see table technical characteristics

EMC and environmental conditions

EMC Interference immunity (EN 61000-6-1, 61 000-6-2 55024)

Electrostatic discharge (ESD) EN 61 000-4-2
Electromagnetic field EN 61 000-4-3
Rapid transients (burst) EN 61 000-4-4
Surge voltages EN 61 000-4-5
Conducted interference voltages EN 61 000-4-6

EMC Interference emission (EN 61000-6-4, EN 55 032, FCC CFR 47 Part 15)


Mechanical stability (EN 60721-3)

IEC 60068-2-6 Vibration
IEC 60068-2-6 Vibration resonance search
IEC 60068-2-27 Shock test

Included in delivery

- Pluggable screw contact for voltage supply
- Assembly instruction

Drawings

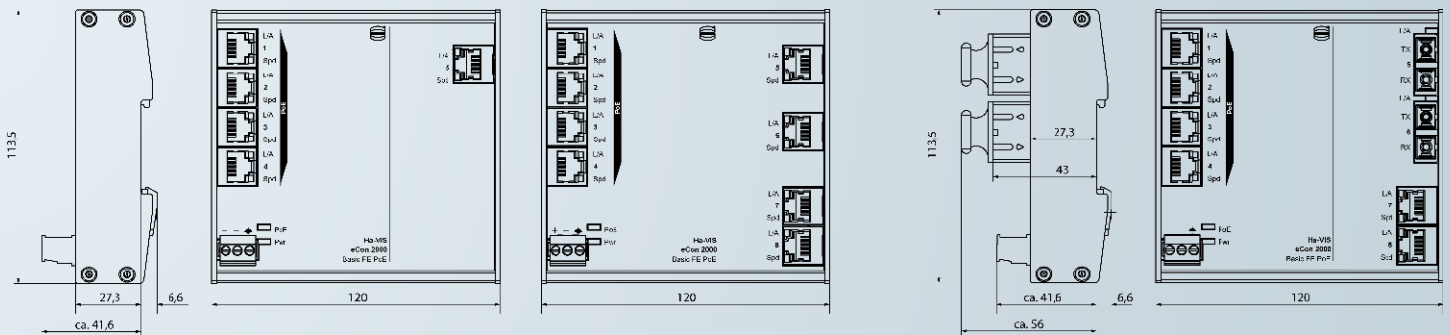

Technical characteristics / order information

Ports / order information

| RJ45 | SFP | SC | Enclosures width | Current consumption@ 54 VDC with PoE | MTBF in Mio. h | Commercial Temp.: 0 °C ... +55 °C | | Industrial Temp.: -40 °C ... +70 °C | |
|------|-----|---------------|------------------|--------------------------------------|----------------|-----------------------------------|--------------------------|-------------------------------------|--------------------------|
| | | | | | | Switch | Part no. | Switch | Part no. |
| 5 | - | - | 120 mm | 2.39 A | 0.84 | Ha-VIS eCon 2050B-A-P | 24020050030 ¹ | Ha-VIS eCon 2050BT-A-P | 24020050020 ¹ |
| 6 | - | 1x MM (2 km) | 120 mm | 2.42 A | 0.78 | Ha-VIS eCon 2061B-AD-P | 24020061130 | Ha-VIS eCon 2061BT-AD-P | 24020061120 |
| 6 | - | 1x SM (15 km) | 120 mm | 2.41 A | 0.79 | Ha-VIS eCon 2061B-AF-P | 24020061230 | Ha-VIS eCon 2061BT-AF-P | 24020061220 |
| 6 | - | 2x MM (2 km) | 120 mm | 2.43 A | 0.76 | Ha-VIS eCon 2062B-AD-P | 24020062130 | Ha-VIS eCon 2062BT-AD-P | 24020062120 |
| 6 | - | 2x SM (15 km) | 120 mm | 2.42 A | 0.78 | Ha-VIS eCon 2062B-AF-P | 24020062230 | Ha-VIS eCon 2062BT-AF-P | 24020062220 |
| 8 | - | - | 120 mm | 2.39 A | 0.73 | Ha-VIS eCon 2080B-A-P | 24020080030 ¹ | Ha-VIS eCon 2080BT-A-P | 24020080020 ¹ |

¹E1 Approval